


Type of luminaire	linear light
Application areas	general lighting
Mounting	Surface-mounted / recessed / pendant
Supply unit	LED Driver integrated (LED Driver DALI on request)
Nominal voltage	220V, 50Hz
System performance	22 W, 28 W, 35 W, 40 W, 54 W, 72 W
Lighting technology	LED SMD 2835
Optic	PMMA, PC
Beam angle	120°
Luminous Flux	3740 - 12240 lm
Light colour	2700 K, 3000 K, 4000 K, 5000 K, 6000 K
CRI	80 - 90
Power factor	0,95
Protection rating	IP66
Cooling	passive
Body	GRP
Body colour	white
Dimensions	1277 x 90 x 95 mm
Weight	1,85 kg
Life time	50 000 hours.
Warranty	5 years/50 000 hours
Certificates	UA, CE



Beam angle options

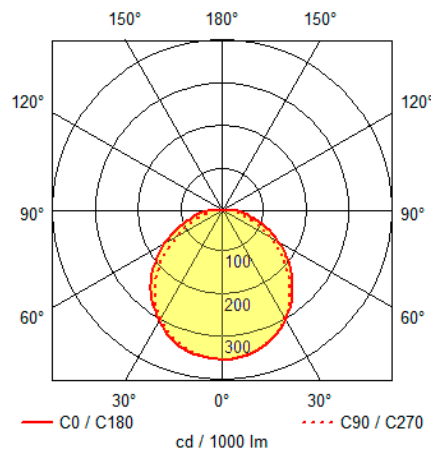

ALBA120 LED

Technical details, as well as size and weight parameters were prepared as accurately as possible. All dimensions in mm. LED Lifetime Information - L90 / B10 at 25 ° C ambient temperature. A tolerance of +/- 10% applies to luminous flux and performance characteristics. Minimum color rendering indices Ra > 80 / > 90. Product images are used as an example and may differ from the original. We reserve the right to make changes in order to improve the product.

Ordering Information

Model	Beam angle	System performance	CRI	Light colour White	Luminous Flux
120 LED 22/827 W	120°	22 W	80	2700 K	2655 lm
120 LED 22/830 W	120°	22 W	80	3000 K	3179 lm
120 LED 22/840 W	120°	22 W	80	4000 K	3740 lm
120 LED 22/850 W	120°	22 W	80	5000 K	3740 lm
120 LED 22/860 W	120°	22 W	80	6000 K	3740 lm
120 LED 28/827 W	120°	28 W	80	2700 K	3380 lm
120 LED 28/830 W	120°	28 W	80	3000 K	4046 lm
120 LED 28/840 W	120°	28 W	80	4000 K	4760 lm
120 LED 28/850 W	120°	28 W	80	5000 K	4760 lm
120 LED 28/860 W	120°	28 W	80	6000 K	4760 lm
120 LED 35/827 W	120°	35 W	80	2700 K	4225 lm
120 LED 35/830 W	120°	35 W	80	3000 K	5058 lm
120 LED 35/840 W	120°	35 W	80	4000 K	5950 lm
120 LED 35/850 W	120°	35 W	80	5000 K	5950 lm
120 LED 35/860 W	120°	35 W	80	6000 K	5950 lm
120 LED 40/827 W	120°	40 W	80	2700 K	4828 lm
120 LED 40/830 W	120°	40 W	80	3000 K	5780 lm
120 LED 40/840 W	120°	40 W	80	4000 K	6800 lm
120 LED 40/850 W	120°	40 W	80	5000 K	6800 lm
120 LED 40/860 W	120°	40 W	80	6000 K	6800 lm
120 LED 54/827 W	120°	54 W	80	2700 K	6518 lm
120 LED 54/830 W	120°	54 W	80	3000 K	7803 lm
120 LED 54/840 W	120°	54 W	80	4000 K	9180 lm
120 LED 54/850 W	120°	54 W	80	5000 K	9180 lm
120 LED 54/860 W	120°	54 W	80	6000 K	9180 lm
120 LED 72/827 W	120°	72 W	80	2700 K	8690 lm
120 LED 72/830 W	120°	72 W	80	3000 K	10404 lm
120 LED 72/840 W	120°	72 W	80	4000 K	12240 lm
120 LED 72/850 W	120°	72 W	80	5000 K	12240 lm
120 LED 72/860 W	120°	72 W	80	6000 K	12240 lm
120 LED 22/927 W	120°	22 W	90	2700 K	2319 lm
120 LED 22/930 W	120°	22 W	90	3000 K	2805 lm
120 LED 22/940 W	120°	22 W	90	4000 K	3273 lm
120 LED 22/950 W	120°	22 W	90	5000 K	3273 lm
120 LED 22/960 W	120°	22 W	90	6000 K	3273 lm
120 LED 28/927 W	120°	28 W	90	2700 K	2951 lm
120 LED 28/930 W	120°	28 W	90	3000 K	3570 lm
120 LED 28/940 W	120°	28 W	90	4000 K	4165 lm
120 LED 28/950 W	120°	28 W	90	5000 K	4165 lm
120 LED 28/960 W	120°	28 W	90	6000 K	4165 lm
120 LED 35/927 W	120°	35 W	90	2700 K	3689 lm
120 LED 35/930 W	120°	35 W	90	3000 K	4463 lm
120 LED 35/940 W	120°	35 W	90	4000 K	5206 lm
120 LED 35/950 W	120°	35 W	90	5000 K	5206 lm
120 LED 35/960 W	120°	35 W	90	6000 K	5206 lm
120 LED 40/927 W	120°	40 W	90	2700 K	4216 lm
120 LED 40/930 W	120°	40 W	90	3000 K	5100 lm
120 LED 40/940 W	120°	40 W	90	4000 K	5950 lm
120 LED 40/950 W	120°	40 W	90	5000 K	5950 lm
120 LED 40/960 W	120°	40 W	90	6000 K	5950 lm

Technical details, as well as size and weight parameters were prepared as accurately as possible. All dimensions in mm. LED Lifetime Information - L90 / B10 at 25 ° C ambient temperature. A tolerance of +/- 10% applies to luminous flux and performance characteristics. Minimum color rendering indices Ra > 80 / > 90. Product images are used as an example and may differ from the original. We reserve the right to make changes in order to improve the product.

Ordering Information

Model	Beam angle	System performance	CRI	Light colour White	Luminous Flux
120 LED 54/927 W	120°	54 W	90	2700 K	5692 lm
120 LED 54/930 W	120°	54 W	90	3000 K	6885 lm
120 LED 54/940 W	120°	54 W	90	4000 K	8033 lm
120 LED 54/950 W	120°	54 W	90	5000 K	8033 lm
120 LED 54/960 W	120°	54 W	90	6000 K	8033 lm
120 LED 72/927 W	120°	72 W	90	2700 K	7589 lm
120 LED 72/930 W	120°	72 W	90	3000 K	9180 lm
120 LED 72/940 W	120°	72 W	90	4000 K	10710 lm
120 LED 72/950 W	120°	72 W	90	5000 K	10710 lm
120 LED 72/960 W	120°	72 W	90	6000 K	10710 lm

Technical details, as well as size and weight parameters were prepared as accurately as possible. All dimensions in mm. LED Lifetime Information - L90 / B10 at 25 ° C ambient temperature. A tolerance of +/- 10% applies to luminous flux and performance characteristics. Minimum color rendering indices Ra > 80 / > 90. Product images are used as an example and may differ from the original. We reserve the right to make changes in order to improve the product.