

Track light


Bruno

AVA TECH

Type of luminaire	track light
Application areas	Accent lighting
Mounting	3P Power Track
Pan/tilt range	355°/90°
Supply unit	LED Driver integrated (LED Driver DALI on request)
Nominal voltage	220V, 50Hz
System performance	26 W, 30 W
Lighting technology	LED COB
Optic	Aluminum reflector MIRO-Silver®
Beam angle	45°x65°
Luminous Flux	3625 - 4290 lm
Light colour	2700 K, 3000 K, 3500 K - True White, 3500 K - Bright Colour, 3500 K, 4000 K,
Light colour Food*	B+C, V, M, F
CRI	80 - 97
Power factor	0,95


Protection rating	IP20
Cooling	passive
Body	Cast aluminum
Body colour	black, white, Special colours on request
Weight	0,8 kg
Life time	50 000 hours
Warranty	5 years/50 000 hours
Certificates	UA, CE

* B = Bakery, V = Vegetable, C = Cheese,
M = Meat, F = Fish

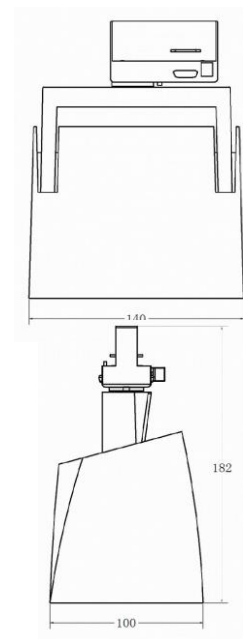

Dimensions

Beam angle options



Bruno 45x65 LED

Technical details, as well as size and weight parameters were prepared as accurately as possible. All dimensions in mm. LED Lifetime Information - L90 / B10 at 25 ° C ambient temperature. A tolerance of +/- 10% applies to luminous flux and performance characteristics. Minimum color rendering indices Ra > 80 / > 90. Product images are used as an example and may differ from the original. We reserve the right to make changes in order to improve the product.

Ordering information

Model	Beam angle	System performance	CRI	Light colour White	Luminous Flux
45x65 LED 26W/827 W 45x65 LED 26W/827 B	45x65°	26 W	80	2700 K	2621 lm
45x65 LED 26W/830 W 45x65 LED 26W/830 B	45x65°	26 W	80	3000 K	3138 lm
45x65 LED 26W/840 W 45x65 LED 26W/840 B	45x65°	26 W	80	4000 K	3692 lm
45x65 LED 26W/850 W 45x65 LED 26W/850 B	45x65°	26 W	80	5000 K	3692 lm
45x65 LED 26W/M W 45x65 LED 26W/M B	45x65°	26 W	-	meat	1735 lm
45x65 LED 26W/B+C W 45x65 LED 26W/B+C B	45x65°	26 W	-	bread & cheese	2141 lm
45x65 LED 26W/V W 45x65 LED 26W/V B	45x65°	26 W	-	vegetables & fruits	2304 lm
45x65 LED 26W/F W 45x65 LED 26W/F B	45x65°	26 W	-	fish	2127 lm
45x65 LED 30W/827 W 45x65 LED 30W/827 B	45x65°	30 W	80	2700 K	3025 lm
45x65 LED 30W/830 W 45x65 LED 30W/830 B	45x65°	30 W	80	3000 K	3621 lm
45x65 LED 30W/840 W 45x65 LED 30W/840 B	45x65°	30 W	80	4000 K	4260 lm
45x65 LED 30W/850 W 45x65 LED 30W/850 B	45x65°	30 W	80	5000 K	4260 lm
45x65 LED 30W/M W 45x65 LED 30W/M B	45x65°	30 W	-	meat	2002 lm
45x65 LED 30W/B+C W 45x65 LED 30W/B+C B	45x65°	30 W	-	bread & cheese	2471 lm
45x65 LED 30W/V W 45x65 LED 30W/V B	45x65°	30 W	-	vegetables & fruits	2658 lm
45x65 LED 30W/F W 45x65 LED 30W/F B	45x65°	30 W	-	fish	2454 lm
45x65 LED 26W/927 W 45x65 LED 26W/927 B	45x65°	26 W	90	2700 K	2289 lm
45x65 LED 26W/930 W 45x65 LED 26W/930 B	45x65°	26 W	90	3000 K	2769 lm
45x65 LED 26W/940 W 45x65 LED 26W/940 B	45x65°	26 W	90	4000 K	3231 lm
45x65 LED 26W/950 W 45x65 LED 26W/950 B	45x65°	26 W	90	5000 K	3231 lm
45x65 LED 30W/927 W 45x65 LED 30W/927 B	45x65°	30 W	90	2700 K	2641 lm
45x65 LED 30W/930 W 45x65 LED 30W/930 B	45x65°	30 W	90	3000 K	3195 lm
45x65 LED 30W/940 W 45x65 LED 30W/940 B	45x65°	30 W	90	4000 K	3728 lm
45x65 LED 30W/950 W 45x65 LED 30W/950 B	45x65°	30 W	90	5000 K	3728 lm

Technical details, as well as size and weight parameters were prepared as accurately as possible. All dimensions in mm. LED Lifetime Information - L90 / B10 at 25 ° C ambient temperature. A tolerance of +/- 10% applies to luminous flux and performance characteristics. Minimum color rendering indices Ra > 80 / > 90. Product images are used as an example and may differ from the original. We reserve the right to make changes in order to improve the product.