

Track light

CONI


AVA TECH

Type of luminaire	track light
Application areas	Accent lighting
Mounting	3P Power Track
Pan/tilt range	355°/110°
Supply unit	LED Driver integrated (LED Driver DALI on request)
Nominal voltage	220V, 50Hz
System performance	22 W, 26 W, 30 W
Lighting technology	LED COB
Optic	Aluminum reflector MIRO-Silver®
Beam angle	24°, 36°, 45°, 60°
Luminous Flux	1500 - 4000 lm
Light colour	2700 K, 3000 K, 3500 K - True White, 3500 K - Bright Colour, 3500 K, 4000 K,
Light colour Food*	B+C, V, M, F
CRI	80 - 97
Power factor	0,95




Protection rating	IP20
Cooling	passive
Body	Cast aluminum
Body colour	black, white, Special colours on request
Weight	1,2 kg.
Life time	50 000 hours.
Warranty	5 years/50 000 hours
Certificates	UA, CE

* B = Bakery, V = Vegetable, C = Cheese,
M = Meat, F = Fish

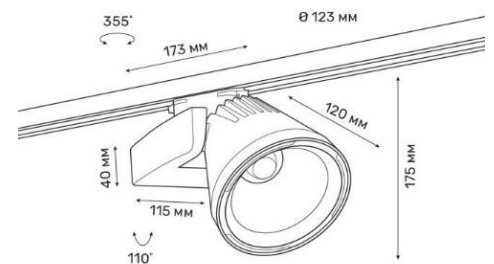

Dimensions

Beam angle options

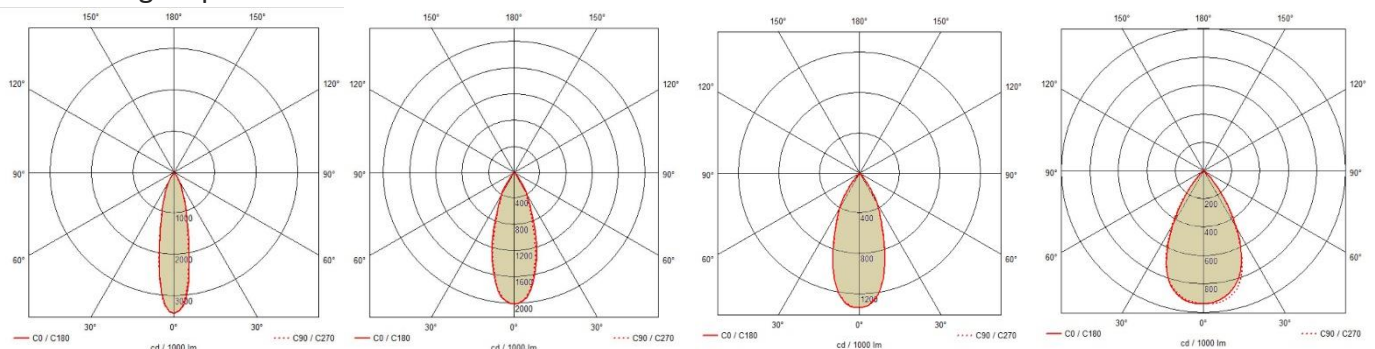

CONI24 LED

CONI36 LED

CONI45 LED

CONI60 LED

Technical details, as well as size and weight parameters were prepared as accurately as possible. All dimensions in mm. LED Lifetime Information - L90 / B10 at 25 ° C ambient temperature. A tolerance of +/- 10% applies to luminous flux and performance characteristics. Minimum color rendering indices $R_a > 80$ / > 90 . Product images are used as an example and may differ from the original. We reserve the right to make changes in order to improve the product.

Ordering information

Model	Beam angle	System performance	CRI	Light colour White	Luminous Flux
24 LED 22W/827 W 24 LED 22W/827 B	24°	22 W	80	2700 K	2359 lm
24 LED 22W/830 W 24 LED 22W/830 B	24°	22 W	80	3000 K	2823 lm
24 LED 22W/840 W 24 LED 22W/840 B	24°	22 W	80	4000 K	3322 lm
24 LED 22W/850 W 24 LED 22W/850 B	24°	22 W	80	5000 K	3322 lm
24 LED 22W/M W 24 LED 22W/M B	24°	22 W	-	meat	1564 lm
24 LED 22W/B+C W 24 LED 22W/B+C B	24°	22 W	-	bread & cheese	1819 lm
24 LED 22W/V W 24 LED 22W/V B	24°	22 W	-	vegetables & fruits	2072 lm
24 LED 22W/F W 24 LED 22W/F B	24°	22 W	-	fish	1914 lm
36 LED 22W/827 W 36 LED 22W/827 B	36°	22 W	80	2700 K	2359 lm
36 LED 22W/830 W 36 LED 22W/830 B	36°	22 W	80	3000 K	2823 lm
36 LED 22W/840 W 36 LED 22W/840 B	36°	22 W	80	4000 K	3322 lm
36 LED 22W/850 W 36 LED 22W/850 B	36°	22 W	80	5000 K	3322 lm
36 LED 22W/M W 36 LED 22W/M B	36°	22 W	-	meat	1564 lm
36 LED 22W/B+C W 36 LED 22W/B+C B	36°	22 W	-	bread & cheese	1819 lm
36 LED 22W/V W 36 LED 22W/V B	36°	22 W	-	vegetables & fruits	2072 lm
36 LED 22W/F W 36 LED 22W/F B	36°	22 W	-	fish	1914 lm
45 LED 22W/827 W 45 LED 22W/827 B	45°	22 W	80	2700 K	2359 lm
45 LED 22W/830 W 45 LED 22W/830 B	45°	22 W	80	3000 K	2823 lm
45 LED 22W/840 W 45 LED 22W/840 B	45°	22 W	80	4000 K	3322 lm
45 LED 22W/850 W 45 LED 22W/850 B	45°	22 W	80	5000 K	3322 lm
45 LED 22W/M W 45 LED 22W/M B	45°	22 W	-	meat	1564 lm
45 LED 22W/B+C W 45 LED 22W/B+C B	45°	22 W	-	bread & cheese	1819 lm
45 LED 22W/V W 45 LED 22W/V B	45°	22 W	-	vegetables & fruits	2072 lm
45 LED 22W/F W 45 LED 22W/F B	45°	22 W	-	fish	1914 lm
60 LED 22W/827 W 60 LED 22W/827 B	60°	22 W	80	2700 K	2359 lm

Technical details, as well as size and weight parameters were prepared as accurately as possible. All dimensions in mm. LED Lifetime Information - L90 / B10 at 25 ° C ambient temperature. A tolerance of +/- 10% applies to luminous flux and performance characteristics. Minimum color rendering indices Ra> 80 /> 90. Product images are used as an example and may differ from the original. We reserve the right to make changes in order to improve the product.

Ordering information

Model	Beam angle	System performance	CRI	Light colour White	Luminous Flux
60 LED 22W/830 W 60 LED 22W/830 B	60°	22 W	80	3000 K	2823 lm
60 LED 22W/840 W 60 LED 22W/840 B	60°	22 W	80	4000 K	3322 lm
60 LED 22W/850 W 60 LED 22W/850 B	60°	22 W	80	5000 K	3322 lm
60 LED 22W/M W 60 LED 22W/M B	60°	22 W	-	meat	1564 lm
60 LED 22W/B+C W 60 LED 22W/B+C B	60°	22 W	-	bread & cheese	1819 lm
60 LED 22W/V W 60 LED 22W/V B	60°	22 W	-	vegetables & fruits	2072 lm
60 LED 22W/F W 60 LED 22W/F B	60°	22 W	-	fish	1914 lm
24 LED 22W/927 W 24 LED 22W/927 B	24°	22 W	90	2700 K	2065 lm
24 LED 22W/930 W 24 LED 22W/930 B	24°	22 W	90	3000 K	2491 lm
24 LED 22W/940 W 24 LED 22W/940 B	24°	22 W	90	4000 K	2908 lm
24 LED 22W/950 W 24 LED 22W/950 B	24°	22 W	90	5000 K	2908 lm
36 LED 22W/927 W 36 LED 22W/927 B	36°	22 W	90	2700 K	2065 lm
36 LED 22W/930 W 36 LED 22W/930 B	36°	22 W	90	3000 K	2491 lm
36 LED 22W/940 W 36 LED 22W/940 B	36°	22 W	90	4000 K	2908 lm
36 LED 22W/950 W 36 LED 22W/950 B	36°	22 W	90	5000 K	2908 lm
45 LED 22W/927 W 45 LED 22W/927 B	45°	22 W	90	2700 K	2065 lm
45 LED 22W/930 W 45 LED 22W/930 B	45°	22 W	90	3000 K	2491 lm
45 LED 22W/940 W 45 LED 22W/940 B	45°	22 W	90	4000 K	2908 lm
45 LED 22W/950 W 45 LED 22W/950 B	45°	22 W	90	5000 K	2908 lm
60 LED 22W/927 W 60 LED 22W/927 B	60°	22 W	90	2700 K	2065 lm
60 LED 22W/930 W 60 LED 22W/930 B	60°	22 W	90	3000 K	2491 lm
60 LED 22W/940 W 60 LED 22W/940 B	60°	22 W	90	4000 K	2908 lm
60 LED 22W/950 W 60 LED 22W/950 B	60°	22 W	90	5000 K	2908 lm
24 LED 26W/827 W 24 LED 26W/827 B	24°	26 W	80	2700 K	2788 lm
24 LED 26W/830 W 24 LED 26W/830 B	24°	26 W	80	3000 K	3337 lm

Technical details, as well as size and weight parameters were prepared as accurately as possible. All dimensions in mm. LED Lifetime Information - L90 / B10 at 25 ° C ambient temperature. A tolerance of +/- 10% applies to luminous flux and performance characteristics. Minimum color rendering indices Ra> 80 /> 90. Product images are used as an example and may differ from the original. We reserve the right to make changes in order to improve the product.

Ordering information

Model	Beam angle	System performance	CRI	Light colour White	Luminous Flux
24 LED 26W/840 W 24 LED 26W/840 B	24°	26 W	80	4000 K	3926 lm
24 LED 26W/850 W 24 LED 26W/850 B	24°	26 W	80	5000 K	3926 lm
24 LED 26W/M W 24 LED 26W/M B	24°	26 W	-	meat	1849 lm
24 LED 26W/B+C W 24 LED 26W/B+C B	24°	26 W	-	bread & cheese	2149 lm
24 LED 26W/V W 24 LED 26W/V B	24°	26 W	-	vegetables & fruits	2449 lm
24 LED 26W/F W 24 LED 26W/F B	24°	26 W	-	fish	2262 lm
36 LED 26W/827 W 36 LED 26W/827 B	36°	26 W	80	2700 K	2788 lm
36 LED 26W/830 W 36 LED 26W/830 B	36°	26 W	80	3000 K	3337 lm
36 LED 26W/840 W 36 LED 26W/840 B	36°	26 W	80	4000 K	3926 lm
36 LED 26W/850 W 36 LED 26W/850 B	36°	26 W	80	5000 K	3926 lm
36 LED 26W/M W 36 LED 26W/M B	36°	26 W	-	meat	1849 lm
36 LED 26W/B+C W 36 LED 26W/B+C B	36°	26 W	-	bread & cheese	2149 lm
36 LED 26W/V W 36 LED 26W/V B	36°	26 W	-	vegetables & fruits	2449 lm
36 LED 26W/F W 36 LED 26W/F B	36°	26 W	-	fish	2262 lm
45 LED 26W/827 W 45 LED 26W/827 B	45°	26 W	80	2700 K	2788 lm
45 LED 26W/830 W 45 LED 26W/830 B	45°	26 W	80	3000 K	3337 lm
45 LED 26W/840 W 45 LED 26W/840 B	45°	26 W	80	4000 K	3926 lm
45 LED 26W/850 W 45 LED 26W/850 B	45°	26 W	80	5000 K	3926 lm
45 LED 26W/M W 45 LED 26W/M B	45°	26 W	-	meat	1849 lm
45 LED 26W/B+C W 45 LED 26W/B+C B	45°	26 W	-	bread & cheese	2149 lm
45 LED 26W/V W 45 LED 26W/V B	45°	26 W	-	vegetables & fruits	2449 lm
45 LED 26W/F W 45 LED 26W/F B	45°	26 W	-	fish	2262 lm
60 LED 26W/827 W 60 LED 26W/827 B	60°	26 W	80	2700 K	2788 lm
60 LED 26W/830 W 60 LED 26W/830 B	60°	26 W	80	3000 K	3337 lm
60 LED 26W/840 W 60 LED 26W/840 B	60°	26 W	80	4000 K	3926 lm

Technical details, as well as size and weight parameters were prepared as accurately as possible. All dimensions in mm. LED Lifetime Information - L90 / B10 at 25 ° C ambient temperature. A tolerance of +/- 10% applies to luminous flux and performance characteristics. Minimum color rendering indices Ra> 80 /> 90. Product images are used as an example and may differ from the original. We reserve the right to make changes in order to improve the product.

Ordering information

Model	Beam angle	System performance	CRI	Light colour White	Luminous Flux
60 LED 26W/850 W 60 LED 26W/850 B	60°	26 W	80	5000 K	3926 lm
60 LED 26W/M W 60 LED 26W/M B	60°	26 W	-	meat	1849 lm
60 LED 26W/B+C W 60 LED 26W/B+C B	60°	26 W	-	bread & cheese	2149 lm
60 LED 26W/V W 60 LED 26W/V B	60°	26 W	-	vegetables & fruits	2449 lm
60 LED 26W/F W 60 LED 26W/F B	60°	26 W	-	fish	2262 lm
24 LED 26W/927 W 24 LED 26W/927 B	24°	26 W	90	2700 K	2441 lm
24 LED 26W/930 W 24 LED 26W/930 B	24°	26 W	90	3000 K	2944 lm
24 LED 26W/940 W 24 LED 26W/940 B	24°	26 W	90	4000 K	3437 lm
24 LED 26W/950 W 24 LED 26W/950 B	24°	26 W	90	5000 K	3437 lm
36 LED 26W/927 W 36 LED 26W/927 B	36°	26 W	90	2700 K	2441 lm
36 LED 26W/930 W 36 LED 26W/930 B	36°	26 W	90	3000 K	2944 lm
36 LED 26W/940 W 36 LED 26W/940 B	36°	26 W	90	4000 K	3437 lm
36 LED 26W/950 W 36 LED 26W/950 B	36°	26 W	90	5000 K	3437 lm
45 LED 26W/927 W 45 LED 26W/927 B	45°	26 W	90	2700 K	2441 lm
45 LED 26W/930 W 45 LED 26W/930 B	45°	26 W	90	3000 K	2944 lm
45 LED 26W/940 W 45 LED 26W/940 B	45°	26 W	90	4000 K	3437 lm
45 LED 26W/950 W 45 LED 26W/950 B	45°	26 W	90	5000 K	3437 lm
60 LED 26W/927 W 60 LED 26W/927 B	60°	26 W	90	2700 K	2441 lm
60 LED 26W/930 W 60 LED 26W/930 B	60°	26 W	90	3000 K	2944 lm
60 LED 26W/940 W 60 LED 26W/940 B	60°	26 W	90	4000 K	3437 lm
60 LED 26W/950 W 60 LED 26W/950 B	60°	26 W	90	5000 K	3437 lm
24 LED 30W/827 W 24 LED 30W/827 B	24°	30 W	80	2700 K	3217 lm
24 LED 30W/830 W 24 LED 30W/830 B	24°	30 W	80	3000 K	3850 lm
24 LED 30W/840 W 24 LED 30W/840 B	24°	30 W	80	4000 K	4530 lm
24 LED 30W/850 W 24 LED 30W/850 B	24°	30 W	80	5000 K	4530 lm

Technical details, as well as size and weight parameters were prepared as accurately as possible. All dimensions in mm. LED Lifetime Information - L90 / B10 at 25 ° C ambient temperature. A tolerance of +/- 10% applies to luminous flux and performance characteristics. Minimum color rendering indices Ra> 80 /> 90. Product images are used as an example and may differ from the original. We reserve the right to make changes in order to improve the product.

Ordering information

Model	Beam angle	System performance	CRI	Light colour White	Luminous Flux
24 LED 30W/M W 24 LED 30W/M B	24°	30 W	-	meat	2133 lm
24 LED 30W/B+C W 24 LED 30W/B+C B	24°	30 W	-	bread & cheese	2480 lm
24 LED 30W/V W 24 LED 30W/V B	24°	30 W	-	vegetables & fruits	2826 lm
24 LED 30W/F W 24 LED 30W/F B	24°	30 W	-	fish	2610 lm
36 LED 30W/827 W 36 LED 30W/827 B	36°	30 W	80	2700 K	3217 lm
36 LED 30W/830 W 36 LED 30W/830 B	36°	30 W	80	3000 K	3850 lm
36 LED 30W/840 W 36 LED 30W/840 B	36°	30 W	80	4000 K	4530 lm
36 LED 30W/850 W 36 LED 30W/850 B	36°	30 W	80	5000 K	4530 lm
36 LED 30W/M W 36 LED 30W/M B	36°	30 W	-	meat	2133 lm
36 LED 30W/B+C W 36 LED 30W/B+C B	36°	30 W	-	bread & cheese	2480 lm
36 LED 30W/V W 36 LED 30W/V B	36°	30 W	-	vegetables & fruits	2826 lm
36 LED 30W/F W 36 LED 30W/F B	36°	30 W	-	fish	2610 lm
45 LED 30W/827 W 45 LED 30W/827 B	45°	30 W	80	2700 K	3217 lm
45 LED 30W/830 W 45 LED 30W/830 B	45°	30 W	80	3000 K	3850 lm
45 LED 30W/840 W 45 LED 30W/840 B	45°	30 W	80	4000 K	4530 lm
45 LED 30W/850 W 45 LED 30W/850 B	45°	30 W	80	5000 K	4530 lm
45 LED 30W/M W 45 LED 30W/M B	45°	30 W	-	meat	2133 lm
45 LED 30W/B+C W 45 LED 30W/B+C B	45°	30 W	-	bread & cheese	2480 lm
45 LED 30W/V W 45 LED 30W/V B	45°	30 W	-	vegetables & fruits	2826 lm
45 LED 30W/F W 45 LED 30W/F B	45°	30 W	-	fish	2610 lm
60 LED 30W/827 W 60 LED 30W/827 B	60°	30 W	80	2700 K	3217 lm
60 LED 30W/830 W 60 LED 30W/830 B	60°	30 W	80	3000 K	3850 lm
60 LED 30W/840 W 60 LED 30W/840 B	60°	30 W	80	4000 K	4530 lm
60 LED 30W/850 W 60 LED 30W/850 B	60°	30 W	80	5000 K	4530 lm
60 LED 30W/M W 60 LED 30W/M B	60°	30 W	-	meat	2133 lm

Technical details, as well as size and weight parameters were prepared as accurately as possible. All dimensions in mm. LED Lifetime Information - L90 / B10 at 25 ° C ambient temperature. A tolerance of +/- 10% applies to luminous flux and performance characteristics. Minimum color rendering indices Ra> 80 /> 90. Product images are used as an example and may differ from the original. We reserve the right to make changes in order to improve the product.

Ordering information

Model	Beam angle	System performance	CRI	Light colour White	Luminous Flux
60 LED 30W/B+C W 60 LED 30W/B+C B	60°	30 W	-	bread & cheese	2480 lm
60 LED 30W/V W 60 LED 30W/V B	60°	30 W	-	vegetables & fruits	2826 lm
60 LED 30W/F W 60 LED 30W/F B	60°	30 W	-	fish	2610 lm
24 LED 30W/927 W 24 LED 30W/927 B	24°	30 W	90	2700 K	2816 lm
24 LED 30W/930 W 24 LED 30W/930 B	24°	30 W	90	3000 K	3397 lm
24 LED 30W/940 W 24 LED 30W/940 B	24°	30 W	90	4000 K	3966 lm
24 LED 30W/950 W 24 LED 30W/950 B	24°	30 W	90	5000 K	3966 lm
36 LED 30W/927 W 36 LED 30W/927 B	36°	30 W	90	2700 K	2816 lm
36 LED 30W/930 W 36 LED 30W/930 B	36°	30 W	90	3000 K	3397 lm
36 LED 30W/940 W 36 LED 30W/940 B	36°	30 W	90	4000 K	3966 lm
36 LED 30W/950 W 36 LED 30W/950 B	36°	30 W	90	5000 K	3966 lm
45 LED 30W/927 W 45 LED 30W/927 B	45°	30 W	90	2700 K	2816 lm
45 LED 30W/930 W 45 LED 30W/930 B	45°	30 W	90	3000 K	3397 lm
45 LED 30W/940 W 45 LED 30W/940 B	45°	30 W	90	4000 K	3966 lm
45 LED 30W/950 W 45 LED 30W/950 B	45°	30 W	90	5000 K	3966 lm
60 LED 30W/927 W 60 LED 30W/927 B	60°	30 W	90	2700 K	2816 lm
60 LED 30W/930 W 60 LED 30W/930 B	60°	30 W	90	3000 K	3397 lm
60 LED 30W/940 W 60 LED 30W/940 B	60°	30 W	90	4000 K	3966 lm
60 LED 30W/950 W 60 LED 30W/950 B	60°	30 W	90	5000 K	3966 lm

Technical details, as well as size and weight parameters were prepared as accurately as possible. All dimensions in mm. LED Lifetime Information - L90 / B10 at 25 ° C ambient temperature. A tolerance of +/- 10% applies to luminous flux and performance characteristics. Minimum color rendering indices Ra> 80 /> 90. Product images are used as an example and may differ from the original. We reserve the right to make changes in order to improve the product.