


built-in light

Jazz LED


AVA TECH

| | |
|---------------------|---|
| Type of luminaire | built-in light |
| Application areas | general and accent lighting |
| Mounting | spring bracket (mounting diameter 175 mm) |
| Supply unit | LED Driver integrated (LED Driver DALI on request) |
| Nominal voltage | 220V, 50Hz |
| System performance | 20 W, 30 W |
| Lighting technology | LED COB |
| Optic | Aluminum reflector |
| Beam angle | 65° |
| Luminous Flux | 1500 - 3800 lm |
| Light colour | 2700 K, 3000 K, 4000 K, 5000 K |
| CRI | 80 - 90 |
| Power factor | 0,95 |
| Protection rating | IP20 |
| Cooling | passive |
| Body | Cast aluminum |
| Body colour | black, white, Special colours on request |
| Weight | 0,85 kg. |
| Life time warranty | 50 000 hours. 5 years/50 000 hours |
| Certificates | UA, CE |

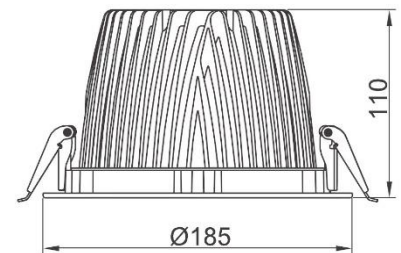

Dimensions

Beam angle options



Jazz65 LED

Technical details, as well as size and weight parameters were prepared as accurately as possible. All dimensions in mm. LED Lifetime Information - L90 / B10 at 25 ° C ambient temperature. A tolerance of +/- 10% applies to luminous flux and performance characteristics. Minimum color rendering indices Ra > 80 / > 90. Product images are used as an example and may differ from the original. We reserve the right to make changes in order to improve the product.

Ordering information

| Model | Beam angle | System performance | CRI | Light colour White | Luminous Flux |
|--------------------------------------|------------|--------------------|-----|--------------------|---------------|
| 65 LED 20W/827 W 65 LED 20W/827 B | 65° | 20 W | 80 | 2700 K | 1798 lm |
| 65 LED 20W/830 W 65 LED 20W/830 B | 65° | 20 W | 80 | 3000 K | 2152 lm |
| 65 LED 20W/840 W 65 LED 20W/840 B | 65° | 20 W | 80 | 4000 K | 2532 lm |
| 65 LED 20W/850 W 65 LED 20W/850 B | 65° | 20 W | 80 | 5000 K | 2532 lm |
| 65 LED 30W/827 W 65 LED 30W/827 B | 65° | 30 W | 80 | 2700 K | 2697 lm |
| 65 LED 30W/830 W 65 LED 30W/830 B | 65° | 30 W | 80 | 3000 K | 3228 lm |
| 65 LED 30W/840 W 65 LED 30W/840 B | 65° | 30 W | 80 | 4000 K | 3798 lm |
| 65 LED 30W/850 W 65 LED 30W/850 B | 65° | 30 W | 80 | 5000 K | 3798 lm |
| 65 LED 20W/927 W 65 LED 20W/927 W | 65° | 20 W | 90 | 2700 K | 1570 lm |
| 65 LED 20W/930 W 65 LED 20W/930 B | 65° | 20 W | 90 | 3000 K | 1899 lm |
| 65 LED 20W/940 W 65 LED 20W/940 B | 65° | 20 W | 90 | 4000 K | 2216 lm |
| 65 LED 20W/950 W 65 LED 20W/950 B | 65° | 20 W | 90 | 5000 K | 2216 lm |
| 65 LED 30W/927 W 65 LED 30W/927 B | 65° | 30 W | 90 | 2700 K | 2355 lm |
| 65 LED 30W/930 W 65 LED 30W/930 B | 65° | 30 W | 90 | 3000 K | 2849 lm |
| 65 LED 30W/940 W 65 LED 30W/940 B | 65° | 30 W | 90 | 4000 K | 3323 lm |
| 65 LED 30W/950 W 65 LED 30W/950 B | 65° | 30 W | 90 | 5000 K | 3323 lm |

Technical details, as well as size and weight parameters were prepared as accurately as possible. All dimensions in mm. LED Lifetime Information - L90 / B10 at 25 ° C ambient temperature. A tolerance of +/- 10% applies to luminous flux and performance characteristics. Minimum color rendering indices Ra > 80 / > 90. Product images are used as an example and may differ from the original. We reserve the right to make changes in order to improve the product.