


Type of luminaire	pendant / overhead
Application areas	general / accent lighting
Mounting	3P Power Track or screws to the ceiling
Pan/tilt range	--
Supply unit	LED Driver integrated (LED Driver DALI on request)
Nominal voltage	220V, 50Hz
System performance	41 W, 58 W, 82 W
Lighting technology	LED SMD 2835
Optic	PMMA
Beam angle	90°
Luminous Flux	5650 - 10447 lm
Light colour	2700 K, 3000 K, 4000 K, 5000 K
CRI	80 - 90
Power factor	0,95
Protection rating	IP20
Cooling	passive
Body	Cast aluminum
Body colour	black, white, Special colours on request
Dimensions	1692 x 54 x 61 mm
Weight	2,95 kg
Life time	50 000 hours.
Warranty	5 years/50 000 hours
Certificates	UA, CE



Beam angle options

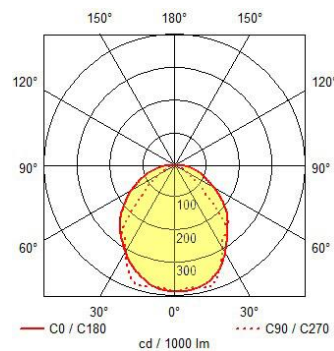

Komo90 LED

Technical details, as well as size and weight parameters were prepared as accurately as possible. All dimensions in mm. LED Lifetime Information – L85 / B10 at 35 ° C ambient temperature. A tolerance of +/- 10% applies to luminous flux and performance characteristics. Minimum color rendering indices Ra > 80 / > 90. Product images are used as an example and may differ from the original. We reserve the right to make changes in order to improve the product.

Ordering information

Model	Beam angle	System performance	CRI	Light colour White	Luminous Flux
90 LED 41W/827 W	90°	41 W	80	2700 K	4011 lm
90 LED 41W/827 W					
90 LED 41W/830 W	90°	41 W	80	3000 K	4802 lm
90 LED 41W/830 B					
90 LED 41W/840 W	90°	41 W	80	4000 K	5650 lm
90 LED 41W/840 B					
90 LED 41W/850 W	90°	41 W	80	5000 K	5650 lm
90 LED 41W/850 B					
90 LED 58W/827 W	90°	58 W	80	2700 K	5465 lm
90 LED 58W/827 W					
90 LED 58W/830 W	90°	58 W	80	3000 K	6542 lm
90 LED 58W/830 B					
90 LED 58W/840 W	90°	58 W	80	4000 K	7697 lm
90 LED 58W/840 B					
90 LED 58W/850 W	90°	58 W	80	5000 K	7697 lm
90 LED 58W/850 B					
90 LED 82W/827 W	90°	82 W	80	2700 K	7417 lm
90 LED 82W/827 W					
90 LED 82W/830 W	90°	82 W	80	3000 K	8880 lm
90 LED 82W/830 B					
90 LED 82W/840 W	90°	82 W	80	4000 K	10447 lm
90 LED 82W/840 B					
90 LED 82W/850 W	90°	82 W	80	5000 K	10447 lm
90 LED 82W/850 B					
90 LED 41W/927 W	90°	41 W	90	2700 K	3503 lm
90 LED 41W/927 W					
90 LED 41W/930 W	90°	41 W	90	3000 K	4237 lm
90 LED 41W/930 B					
90 LED 41W/940 W	90°	41 W	90	4000 K	4944 lm
90 LED 41W/940 B					
90 LED 41W/950 W	90°	41 W	90	5000 K	4944 lm
90 LED 41W/950 B					
90 LED 58W/927 W	90°	58 W	90	2700 K	4772 lm
90 LED 58W/927 W					
90 LED 58W/930 W	90°	58 W	90	3000 K	5772 lm
90 LED 58W/930 B					
90 LED 58W/940 W	90°	58 W	90	4000 K	6735 lm
90 LED 58W/940 B					
90 LED 58W/950 W	90°	58 W	90	5000 K	6735 lm
90 LED 58W/950 B					
90 LED 82W/927 W	90°	82 W	90	2700 K	6477 lm
90 LED 82W/927 W					
90 LED 82W/930 W	90°	82 W	90	3000 K	7835 lm
90 LED 82W/930 B					
90 LED 82W/940 W	90°	82 W	90	4000 K	9141 lm
90 LED 82W/940 B					
90 LED 82W/950 W	90°	82 W	90	5000 K	9141 lm
90 LED 82W/950 B					

Technical details, as well as size and weight parameters were prepared as accurately as possible. All dimensions in mm. LED Lifetime Information – L85 / B10 at 35 ° C ambient temperature. A tolerance of +/- 10% applies to luminous flux and performance characteristics. Minimum color rendering indices Ra> 80 /> 90. Product images are used as an example and may differ from the original. We reserve the right to make changes in order to improve the product.