


Type of luminaire	linear light
Application areas	general lighting
Mounting	Surface-mounted / recessed / pendant
Supply unit	LED Driver integrated (LED Driver DALI on request)
Nominal voltage	220V, 50Hz
System performance	10 W, 24 W
Lighting technology	LED SMD 2835
Optic	PMMA, PC
Beam angle	135°
Luminous Flux	1600 - 3840 lm
Light colour	2700 K, 3000 K, 4000 K, 5000 K
CRI	80 - 90
Power factor	0,95
Protection rating	IP20 or IP54 or IP65
Cooling	passive
Body	aluminum
Body colour	black, white, Special colours on request
Dimensions	585 x 65 x 64 mm for 10W 1130 x 65 x 64 mm for 24 W
Weight	1,47 kg for 10W 2,2 kg for 24 W
Life time	50 000 hours.
Warranty	5 years/50 000 hours
Certificates	UA, CE



Beam angle options

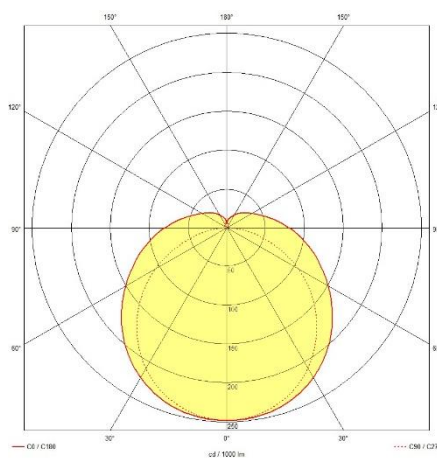

QUEERT135 LED

Technical details, as well as size and weight parameters were prepared as accurately as possible. All dimensions in mm. LED Lifetime Information - L90 / B10 at 25 ° C ambient temperature. A tolerance of +/- 10% applies to luminous flux and performance characteristics. Minimum color rendering indices Ra > 80 / > 90. Product images are used as an example and may differ from the original. We reserve the right to make changes in order to improve the product.

Ordering Information

Model	Beam angle	System performance	CRI	Light colour White	Luminous Flux
135 LED 10/827 W 135 LED 10/827 B	135°	10 W	80	2700 K	1136 Lm
135 LED 10/830 W 135 LED 10/830 B	135°	10 W	80	3000 K	1360 Lm
135 LED 10/840 W 135 LED 10/840 B	135°	10 W	80	4000 K	1600 Lm
135 LED 10/850 W 135 LED 10/850 B	135°	10 W	80	5000 K	1600 Lm
135 LED 10/927 W 135 LED 10/927 B	135°	10 W	90	2700 K	992 Лм
135 LED 10/930 W 135 LED 10/930 B	135°	10 W	90	3000 K	1200 Лм
135 LED 10/940 W 135 LED 10/940 B	135°	10 W	90	4000 K	1400 Лм
135 LED 10/950 W 135 LED 10/950 B	135°	10 W	90	5000 K	1400 Лм
135 LED 24/827 W 135 LED 24/827 B	135°	24 W	80	2700 K	2726 Lm
135 LED 24/830 W 135 LED 24/830 B	135°	24 W	80	3000 K	3264 Lm
135 LED 24/840 W 135 LED 24/840 B	135°	24 W	80	4000 K	3840 Lm
135 LED 24/850 W 135 LED 24/850 B	135°	24 W	80	5000 K	3840 Lm
135 LED 24/927 W 135 LED 24/927 B	135°	24 W	90	2700 K	2381 Лм
135 LED 24/930 W 135 LED 24/930 B	135°	24 W	90	3000 K	2880 Лм
135 LED 24/940 W 135 LED 24/940 B	135°	24 W	90	4000 K	3360 Лм
135 LED 24/950 W 135 LED 24/950 B	135°	24 W	90	5000 K	3360 Лм

Technical details, as well as size and weight parameters were prepared as accurately as possible. All dimensions in mm. LED Lifetime Information - L90 / B10 at 25 ° C ambient temperature. A tolerance of +/- 10% applies to luminous flux and performance characteristics. Minimum color rendering indices Ra > 80 / > 90. Product images are used as an example and may differ from the original. We reserve the right to make changes in order to improve the product.